




PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>A47G 19/22</b>	<b>A1</b>	(11) International Publication Number: <b>WO 97/03594</b> (43) International Publication Date: 6 February 1997 (06.02.97)
<p>(21) International Application Number: PCT/IB96/00736</p> <p>(22) International Filing Date: 2 July 1996 (02.07.96)</p> <p>(30) Priority Data: 08/503,142 17 July 1995 (17.07.95) US</p> <p>(71) Applicant: PLAYTEX PRODUCTS, INC. [US/US]; 300 Nyala Farms Road, Westport, CT 06880 (US).</p> <p>(72) Inventor: MORANO, Emanuel, P.; 10 Floyd Drive, Totowa, NJ 17512 (US).</p> <p>(74) Agent: RUGGIERO, Charles, N., J.; Ohlandt, Greeley, Ruggiero &amp; Perle, Suite 903, One Landmark Square, Stamford, CT 06901 (US).</p>		<p>(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p><b>Published</b> <i>With international search report.</i></p>

(54) Title: COVERED DRINKING CUP

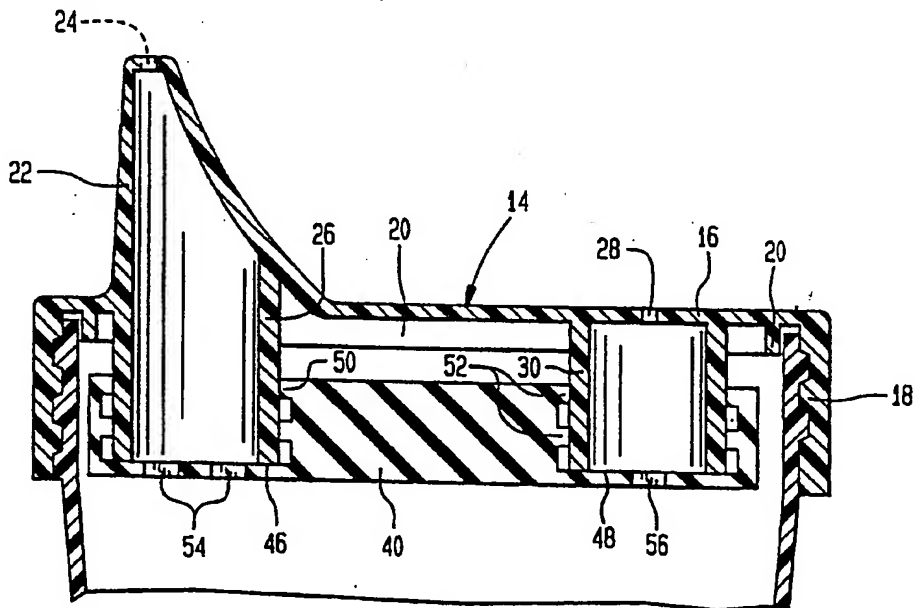

## (57) Abstract

A drinking cup container (12) has a cover (14) which is formed with a drinking spout (22) at one side and a vent (28) at the other. Elements (26, 30) extend down from under the spout and the vent. A flow control element (40) is provided and made of elastomeric material having a pair of spaced cavities (42, 44) on one side, each cavity having a floor (46, 48) at the bottom thereof. The cavities receive in frictional engagement, respectively, the lower ends of the elements. This engagement supports the flow control element with the floor of each cavity in sealed relation to its element. Each floor has a passage (54, 56) which is normally closed, but opens on the occurrence of a pressure differential on opposite sides of the floor.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

COVERED DRINKING CUP5 FIELD OF THE INVENTION

This invention relates to a covered drinking cup of the type often used by infants and children as a training cup because it safeguards against spills and provides liquid  
10 flow through a nipple-like spout. More specifically, this invention relates to covered drinking cups that provide a leak-proof flow of the liquid and venting of the head space as liquid is withdrawn.

15 BACKGROUND OF THE INVENTION

In the past nursing bottles and cups for dispensing milk and other liquids to infants and children have often been in the form of vented covered containers. For  
20 instance, U.S. Patent No. 2,372,281 to Jordan, which issued on March 27, 1945, has a cover that provides a nipple on one side having flow-regulating means and a vent on the other side also having flow-regulating means. By adjusting the two flow-regulating means, the user can comfortably draw  
25 liquid from the nipple. As the liquid is withdrawn, air moves in through the vent to replace the withdrawn liquid and prevent negative pressure build-up which in the extreme can stop liquid flow.

Another covered drinking cup is disclosed in U.S. Patent No. 2,608,841 to Rice which issued on September 2, 1952. As the venting means, the Rice cup provides a manually adjustable valve which controls the ease with which  
5 air is admitted into the cup for venting. It thereby regulates the flow of liquid.

With respect to the admission of air into nursing bottles and the like, check valves have often been used and  
10 are disclosed in the U.S. Patent Nos. 4,401,224 to Alonso which issued on August 30, 1983; 4,545,491 to Bisgaard, et al. which issued on October 8, 1985; 4,723,668 to Cheng which issued on February 9, 1988; and 4,828,126 to Vincinguerra which issued on May 6, 1989.

15

Other vent means are disclosed in U.S. Patent No. 4,865,207 to Joyner, et al. which issued on September 12, 1989 in which a fabric hydrophobic filter passes air into the nurser.

20

U.S. Patent No. 4,135,513 to Arisland, which issued on January 23, 1979, discloses a drinking nozzle for a nursing bottle which incorporates air venting means, opening a valve when the pressure within the container is substantially less  
25 than atmospheric pressure to thereby vent the head space.

U.S. Patent No. 5,079,013 to Belanger, which issued on January 7, 1992, discloses a dripless liquid feeding/training container in which the cover is provided with two spring-biased check valves. One check valve is a spring biased ball check that permits inward air flow for venting and the other check valve is a spring-biased outlet valve that opens by the sucking action of the infant and springs closed when the sucking action relents. The container is described as "dripless".

10

One of the shortcomings of some of the prior art is that the valves involved have metal parts. Further, the number of the parts involved makes such containers difficult to manufacture, assemble and clean. There is, hence, a need for a less complicated structure that eliminates the metal parts, and is readily washable. It is to such a need that the present invention is directed. In a preferred embodiment, the control element has additional means to retain it in place in the cup even during impact.

20

#### SUMMARY OF THE INVENTION

The present invention is a control element for a drinking cup, and the drinking cup in which the cover has a drinking spout at one side and a vent at the other. Tubular elements extend down from under the spout and the vent. The flow control element of elastomeric material is provided

having a pair of spaced cavities on one side, each cavity having a floor at the bottom thereof. In assembly, the cavities receive in frictional engagement the lower ends of the tubular elements. This engagement supports the flow  
5 control element with the floor of each cavity in sealed relation with respect to its tubular element. Each floor has a passage that is normally closed but opens on the occurrence of a pressure differential on opposite sides of the floor.

10

In a preferred embodiment, the control element includes a pair of shoulders that assist in maintaining the control element in place even during impact.

BRIEF DESCRIPTION OF THE DRAWINGS

Further objects and features of the present invention will be apparent to those skilled in the art from a study of  
5 the following specification and the accompanying drawings, all of which disclose a non-limiting embodiment of the invention. In the drawings:

Fig. 1 is a perspective view of an assembled drinking  
10 cup that embodies the invention;

Fig. 2 is an enlarged perspective view of a first embodiment of the flow control element of the invention;

15 Fig. 3 is a top plan view of the flow control element of Fig. 2;

Fig. 4 is an enlarged fragmentary sectional view taken on the line 4-4 of Fig. 1;

20

Fig. 5 is an enlarged perspective view of a second embodiment of the flow control element of the invention; and

Fig. 6 is an enlarged fragmentary sectional view taken  
25 on the line 4-4 of Fig. 1 of the flow control element of the second embodiment of Fig. 5.

DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring to the drawings and, in particular, Fig. 1, a drinking cup that embodies the invention is generally represented by reference numeral 10. The drinking cup 10 comprises a cup-shaped container 12 having a cover 14 that may be screwed on to the top of the container by cooperating threads shown in Fig. 4. The cover 14 comprises a top wall 16 and a depending downward or side wall 18 formed with interior threads that engage exterior threads about the mouth of the container 12 as described.

Just inside the downward wall 18, the cover 14 may be provided with a short annular wall 20. Also, an O-ring (not shown) may be disposed in between the annular wall 20 and the side wall 18 of the cover 14. The O-ring may be compressed to form a liquid sealing joint between the cover 14 and the container 12.

One side of the top wall 16 is provided with a drinking spout 22 which has dispensing openings 24 at its distal end. Formed unnaturally with the cover 14 and extending downward from the spout 22 inside the cover is an element 26. In the embodiment shown in Fig. 1, the spout 22 and element 26 are tubular elements, however these elements can be any geometric shape. It is important that the spout 22 and element 26 communicate into liquid tight engagement.



Therefore, the spout 22 and element 26 preferably have holes therethrough of the same shape.

At the opposite side of the top wall 16, the cover 14  
5 is provided with a vent 28. Formed unnaturally with the cover 14 is a downward element 30 which communicates with the vent 28. In a preferred embodiment, element 30 is tubular in shape, however it can also be any shape. It is also preferable, that the since the vent 28 and element 30  
10 have air tight communication between each other, that they have holes therethrough of the same shape.

Both elements 26 and 30 terminate downwardly at the same level in downwardly facing openings. In the preferred  
15 embodiment, both elements 26 and 30 are tubular or cylindrical. Since element 26 communicates with the spout 22, while the element 30 communicates with the vent 28, the diameter of element 26 is preferably larger than the diameter of element 30. However, it is understood that the  
20 diameter of the holes of each element 26, 30 can be any size and shape depending on the size and shape of the spout 22 and vent 28, respectively.

As shown in Fig. 2, there is provided a flow control  
25 element 40. It is preferably a single piece of elastomeric material, such as, for example, thermoplastic elastomer, silicone, or a soft rubber. The elastomeric material is

resilient and flexible and does not have any separate parts, such as balls and springs. The control element 40 has a pair of spaced cavities 42, 44 formed in one side. The pair of spaced cavities 42, 44 are formed near opposite ends 41  
5 of the control element 40. The cavities 42, 44 can have any shape, however they should have a shape that complements the shapes of elements 26, 30, respectively. Therefore, in a preferred embodiment, cavities 42, 44 should have a tubular or circular shape. Each cavity 42, 44 has a one or any  
10 number more of ribs 50, 52, respectively. In the preferred embodiment, each cavity 42, 44 has two ribs. These ribs 50, 52 act to seal the cavity 42, 44 to the respective element 26, 30.

15 Also, cavity 42 complements element 26 that communicates with spout 22, and cavity 44 complements element 30 that communicates with vent 28. Accordingly, in the preferred embodiment, the cavities 42, 44 are cylindrical. Furthermore, the diameter of cavity 42 is  
20 greater than the diameter of cavity 44 due to the difference in the diameters of the spout 22 and the vent 28. For example, in an embodiment in which the elements 26, 30 are cylindrical and with conventional, different diameters, cavity 42 has a rib diameter about 0.57 inches  
25 and a flat (the area between ribs) diameter about 0.63 inches, whereas cavity 44 has a rib diameter about .50 inches and a flat diameter about 0.55 inches.

In the preferred embodiment, the spout 22 is closer to side wall 18 than vent 28. Accordingly, as shown in Fig. 4, the cavity 42 is closer to edge 41 than cavity 44 is to  
5 respective edge 41. It should be understood, however, that if the relationship of the spout 22 and vent 28 to side wall 18 varies so does the relationship of the cavities 42, 44 to edge 41. Accordingly, cavities 42, 44 can be equidistant from respective edges 41, or cavity 44 can be closer than  
10 cavity 42 to respective edge 41.

The control element 40 is formed with floors 46, 48 at the bottom of each cavity 42, 44, respectively. As stated above, extending inward from the sides of each cavity 42, 44  
15 are, in a preferred embodiment, a pair of spaced horizontal inward circumferential ribs 50, 52, respectively. In particular, cavity 44 has a pair of ribs 50, and cavity 44 has a pair of ribs 52. As also stated above, each cavity may have any number of ribs. The ribs 50, 52 secure the  
20 control element 40 onto elements 26, 30, respectively, by frictional engaging the exterior walls of the elements. It is preferred that the lowermost one of the pair of ribs 50 in cavity 46 not contact floor 46, and likewise the  
lowermost one of the pair of ribs 52 in cavity 44 not  
25 contact floor 48. By this feature, the least amount of tension is placed on the control element 40 during use. By

minimizing this tension, the sealing characteristics of the slit is optimized.

Referring to Figs. 3 and 4, the floors 46, 48 are  
5 formed with slits 54, 56, respectively. The slits 54, 56  
can have many forms, two of which are "Y"- or "X"-shaped  
slits for the passage of fluid. Preferably, one slit 54, 56  
in each floor 46, 48, respectively, is sufficient to  
facilitate the passage of liquid in element 26 and the  
10 passage of air in element 30. However, multiple slits in  
each floor may be designed to provide the same function.

In the assembly shown in Fig. 4, the two cavities 42,  
44 are aligned with the two, preferably tubular, elements  
15 26, 30 and the control element 40 is raised. The  
elastomeric nature of the control element 40 is sufficient  
to flex as the control element is effected. The control  
element 40 is then shoved "home" on each element 26, 30 so  
that the lower ends of the elements abut against the floors  
20 46, 48, respectively and effect therewith a snug contact  
that amounts to a seal, especially in view of ribs 50, 52  
frictional contact on elements 26, 30, respectively. Slight  
imprecision in the dimensions of the cavities 42, 44 or of  
the control element 40 can be tolerated due to the soft  
25 resilient nature of the control element and, perhaps, the  
ribs 50, 52.

After the container 12 is filled with liquid, the cover 14 is screwed onto the container. As the infant tilts the container and sucks liquid through the openings 24, the slits 54 yield and part in the center of the slits. When the sucking pressure relents, the resilience of the cavity 42 causes the slit 54 to close once more so that were the cup 10 to be tipped over or to fall on the floor, no appreciable liquid would pass out the openings 24.

As the liquid is removed as by sucking on spout 22, a negative pressure builds up in the headspace above the liquid. To avoid this pressure --pressure differential across the floor 48-- becoming too great, the slits 56 yield, the centers moving downward to permit passage of atmosphere through the opening 28 and through the slits. When the pressure differential is substantially returned to zero, the resilience of the control element 40 causes the slits 56 to close so that should an upset occur, no liquid could escape outwardly therefrom through vent opening 28, and a leak through that route is avoided.

Referring to the second embodiment of Figs. 5 and 6, the same elements recited above will bear the same reference numeral except with a prime. As shown in Fig. 5, the control element 40' includes a pair of shoulders 62, 64 adjacent the opposite ends or edges 41' of the control element, and extending in a direction opposite the opening

of each cavity 42', 44'. Each shoulder 62, 64 has a surface configuration analogous to that of the ends 41'.

As shown in Fig. 6, in the most preferred embodiment,  
5 each shoulder 62, 64 has a portion 66 that may be either straight or chamfered and an inwardly chamfered or angled portion 67. The chamfered portion 67 is adapted to mate with the inside surface of the side walls 18' of the container in order to prevent the control element from  
10 disengaging elements 26' and 30'. In a preferred embodiment, the chamfered portion 67 may be at angle of about seventy-seven degrees with the vertical, straight portion.

15 In the most preferred embodiment shown in Fig. 6, each shoulder 62, 64 has a vertical extant of the valve and shoulder about 0.54 inches. The vertical extant of each shoulder 62, 64 is affected by its distance from edge 41, which as stated above is dictated by the position of spout  
20 22' and vent 28' from the side wall 18' of the container.

It is understood that the shoulders 62, 64 can consist solely of a straight portion, an outwardly angled, an inwardly angled portion or any combination of same depending  
25 on the angle of the walls of the container 12. In addition, the shoulders 62, 64 can have any shape. The sole criteria is that it mates with the inside of the side walls 18' of

the container to help prevent the control element 40 from disengaging the elements 26', 30'. The pressure for the control element 40' to dislodge particularly occurs when the control element 40' is forced away from the spout and vent  
5 of the cover upon impact.

In either embodiments, after use, the cup 10 of the invention may be readily disassembled. Referring to Fig. 1, the cover 14 may be removed and the control element 40  
10 simply withdrawn off the elements 26, 30. All of the components are readily washable.

It will be seen that the invention provides a training cup of three simple parts which is inexpensively and readily  
15 made and assembled and works effectively to avoid spills and drips.

The invention described here may take a number of forms. It is not limited to the embodiment disclosed but is  
20 of a scope defined by the following claim language which may be broadened by an extension of the right to exclude others from making, using or selling the invention as is appropriate under the doctrine of equivalents.

WHAT I CLAIM IS:

## 1. A drinking cup comprising:

5 a cup-shaped container having a removable leakproof cover, the cover comprising a top wall having at one side an upwardly extending drinking spout and spaced therefrom a vent, the top wall being formed on its underside with a pair of spaced elements, one of the pair of spaced elements  
10 communicating with and extending downward from under the spout and the other of the pair of elements communicating with and extending downward from the vent; and

a flow control element comprising a flat piece of  
15 flexible elastomeric material having a pair of spaced cavities on one side, each of said pair of cavities having a floor at the bottom thereof, each of said pair of cavities receiving respectively the lower ends of the elements in frictional engagement sufficient to support said  
20 flow control element with said floors in sealed relation to the respective elements, each of said floors having a passage therethrough which is normally closed but opens upon occurrence of a pressure differential on opposite sides of said floor.

25

2. The drinking cup according to claim 1, wherein the elements are cylindrical.



3. The drinking cup according to claim 2, wherein the elements are of different diameters.

4. The drinking cup according to claim 1, wherein the  
5 element connected to the spout is of larger diameter than the element connected to the vent.

5. The drinking cup according to claim 2, wherein each of said pair of cavities is also cylindrical and sized in  
10 diameter to mate with the respective element.

6. The drinking cup according to claim 1, wherein said floor associated with the element connected to the spout is formed with a plurality of openable passages.

15

7. The drinking cup according to claim 6, wherein each of the plurality of passages comprises a plurality of slits extending radially out from a point so that during pressure differential adjacent slits define pie-slice flaps.

20

8. The drinking cup according to claim 1, wherein each of said pair of cavities has side wall surfaces formed with inward ribs.

25 9. A flow control element removably positioned on a pair of spaced fluid-conducting elements, the flow control element comprising a flat elongate piece of material having

a pair of spaced cavities in a first side thereof, each of said pair of cavities having a floor at the bottom thereof, each of said pair of cavities snugly receiving respectively the ends of the fluid-conducting elements in frictional  
5 engagement sufficient to support said flow control element with said floors in sealed relation to the fluid-conducting elements, each of said floors having a passage therethrough that is normally closed but opens upon occurrence of a pressure differential on opposite sides of said floor.

10

10. The flow control element according to claim 9, wherein each of said pair of cavities has a different diameters.

15 11. The flow control element according to claim 9, wherein each of said pair of cavities is cylindrical and sized in diameter to mate with the respective fluid-conducting element.

20 12. The flow control element according to claim 9, wherein said floor associated with the fluid-conducting element connected to the drinking spout is formed with a plurality of openable passages.

25 13. The flow control element according to claim 12, wherein the plurality of openable passages each comprise a plurality of slits extending radially out from a point so

that during pressure differential adjacent slits define pie-slice flaps.

14. The flow control element according to claim 9,  
5 wherein each cavity has wall surfaces formed with inward ribs.

15. The flow control element according to claim 9,  
further comprising a pair of shoulders.

10

16. The flow control element according to claim 15,  
wherein each of said pair of shoulders extends in a  
direction opposite the first side.

15 17. The flow control element according to claim 16,  
wherein each of said pair of shoulders has a straight  
portion and a chamfered portion.

18. The flow control element according to claim 17,  
20 wherein the chamfered portion forms an angle of about  
seventy-seven degrees.

19. The drinking cup comprising:

25 a cup-shaped container having a removable leakproof  
cover, the cover comprising a top wall having at one side an  
upwardly extending drinking spout and on the opposite side a

vent, the top wall being formed unnaturally on its underside with spaced conduits extending downward from under the spout and the vent respectively and communicating therewith respectively, and

5


a flat flow controller of resilient material having a pair of spaced cavities on one side, each of said pair of cavities having a diaphragm at the bottom thereof, each of said pair of cavities receiving respectively the lower ends  
10 of the conduits in frictional engagement sufficient to support the flow controller with the diaphragms in sealed relation to the respective elements, each of the diaphragms having a passage therethrough which is normally closed but opens upon occurrence of a pressure differential on opposite  
15 sides of the diaphragm.

20. The drinking cup according to claim 19, wherein said flow controller further comprises a pair of shoulders.

20 21. A method of controlling flow of fluid in a liquid-containing closed vessel having a top wall formed with an outlet spout through which the liquid may be aspirated and a vent spaced from the spout, the spout and vent having parallel elements extending into the vessel, the method  
25 comprising the step of

(1) providing a flat element of flexible elastomeric material having a pair of spaced cavities on one side, each cavity having a floor at the bottom thereof; and

5       (2) installing the flat element with the cavities receiving and frictionally engaging respectively the elements so that the elements are in sealing relation with the floors respectively, the floors each having passages therein openable upon the occurrence of a pressure  
10 differential on opposite sides of the floor.

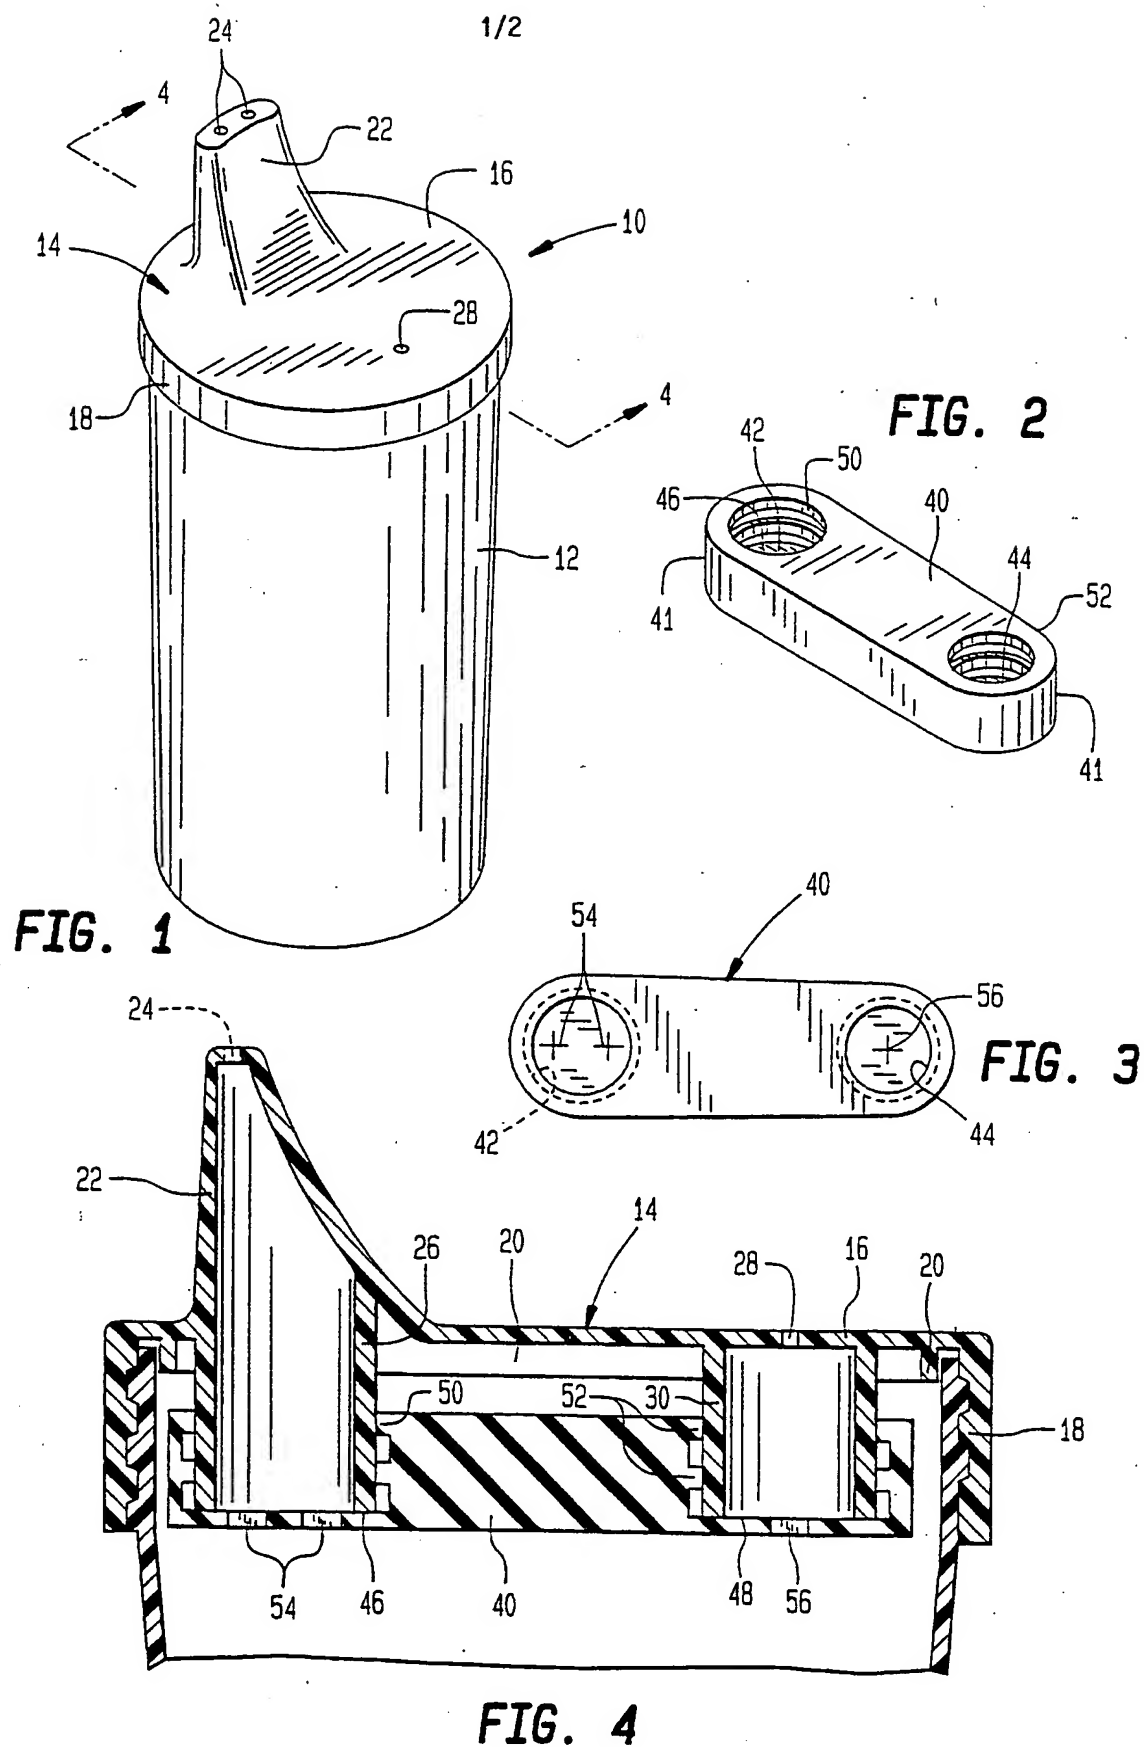

2/2

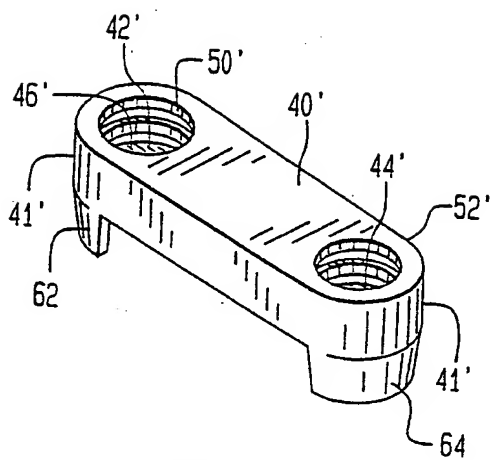


FIG. 5

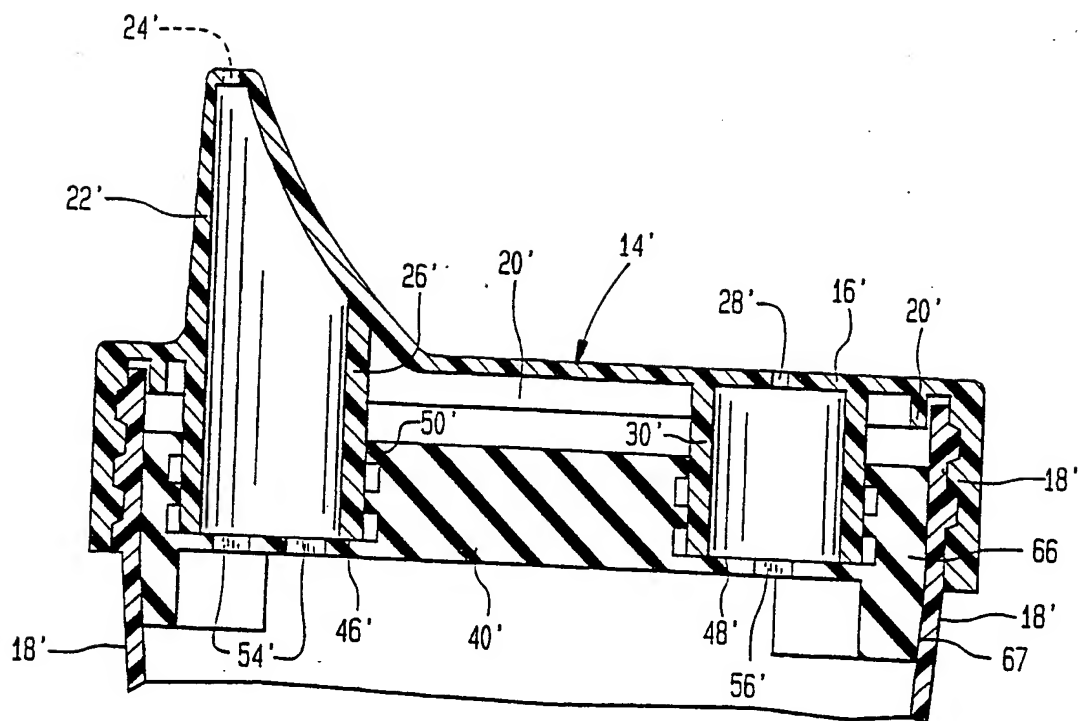


FIG. 6

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/IB96/00736

## A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) :A47G 19/22

US CL :220/714

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : Please See Extra Sheet.

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US, A, 2,372,281 (JORDAN) 27 MARCH 1945, SEE ENTIRE DOCUMENT.	ALL
A	US, A, 2,608,841 (RICE) 02 SEPTEMBER 1952, SEE ENTIRE DOCUMENT.	ALL
A	US, A, 3,635,380 (FITZGERALD) 18 JANUARY 1972, SEE ENTIRE DOCUMENT.	ALL
A,	US, A, 4,204,604 (MORIN, ET AL.) 27 MAY 1980, SEE ENTIRE DOCUMENT.	ALL
A	US, A, 5,079,013 (BELANGER) 07 JANUARY 1992, SEE ENTIRE DOCUMENT.	ALL

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Z" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

09 OCTOBER 1996

Date of mailing of the international search report

24 OCT 1996

Name and mailing address of the ISA/US  
Commissioner of Patents and Trademarks  
Box PCT  
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

for ROBIN A. HYLTON

Telephone No. (703) 308-1208

*Sheila Venev*  
Sheila Venev  
Patent Specialist  
Group 3200



# INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB96/00736

## B. FIELDS SEARCHED

Minimum documentation searched

Classification System: U.S.

137/588,845,512.4; 215/11.1,11.4,11.5,DIG.7,902,387,389,262,270,307,309,310,329,354,311,315,247-249,355;  
220/714,705,503,711,714,717,719,721,724,231,240,254,253;222/482,494,490